

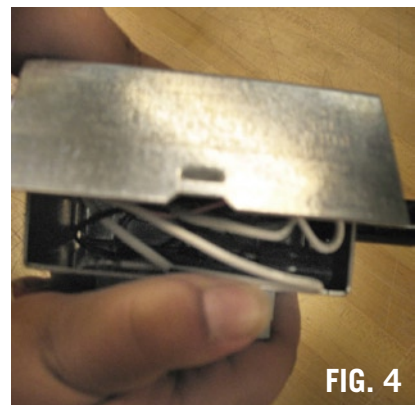


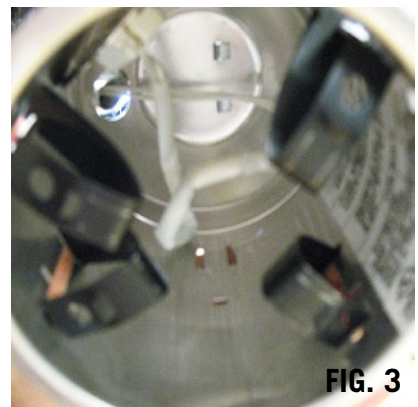

Instructions for Removal of LV3R

1. Make sure power to the fixture is off.
2. Remove trim from fixture by pulling straight down. **(fig 1)**
3. Remove lamp from trim. Disconnect lamp socket from lamp.
4. Place trim and lamp aside for reinstallation.
5. Using a flat blade screw driver, disengage black springs that retain fixture in the ceiling. **(fig 2)**
6. Fold black springs into the fixture. **(fig 3)**
7. Pull fixture straight down and remove from ceiling.
8. Open junction box cover and remove wire nuts. **(fig 4)**
9. Disengage wires from junction box.

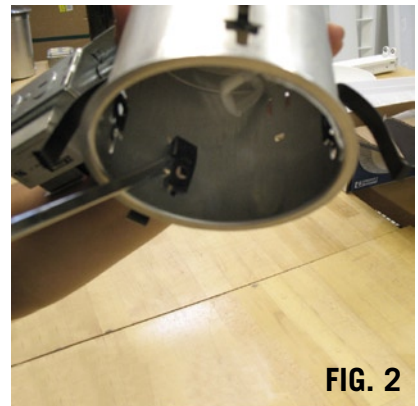

Wiring of LV3R

1. Open snap-on junction box captive door and remove the appropriate pry-out with a flat blade screwdriver. Built in Romex clamps are accessible through the corner Romex pry-outs. **(fig 1)**
2. Bring supply wires into box using Romex cable or shielded cable. **(fig 2)**
3. Make all connections inside the junction box.
4. Connect black supply wire to black wire in junction box, white wire to white wires and connect green wire to bare wire lead for ground. **(fig 3-5)**
5. Replace snap-on junction box captive door. **(fig 6)**
6. Insert fixture into ceiling through hole. **(fig 7)**
7. While holding fixture in ceiling, push black spring clips against inside of can.
8. Make sure fixture is secure.
9. Connect socket to lamp. **(fig 8)**
10. Insert lamp into the trim. **(fig 9)**
11. Insert trim into fixture and make sure it seats against the ceiling . **(fig 10)**
12. Turn power on.

